



**SPECIFICATION**  
 1. Rating : DC 30V 0.5A;  
 2. Contact resistance:  $\leq 0.03\Omega$ ;  
 3. Insulation resistance:  $\geq 100M\Omega$  (DC250V);  
 4. Withstand voltage: 500VAC ;  
 5. Insertion and extraction force: 3-20N;  
 6. life test: 5,000 cycles.

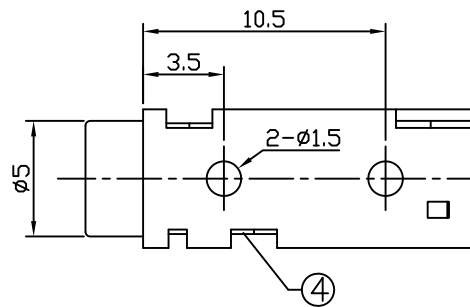

**SCHEMATIC**

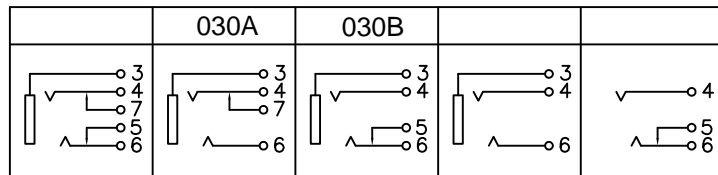

7	CURVE PIECE	1	BRASS	Ag-Plating
6	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
5	CURVE PIECE	1	BRASS	Ag-Plating
4	2#CONTACT	1	Y-CUT	Ag-Plating
3	1#CONTACT	1	Y-CUT	Ag-Plating
2	COVER	1	PA46	Ag-Plating
1	HOUSING	1	PA46	

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
UNIT: MM	TYPE:	MODEL NO:	PAPER NO:	PAGE 1 OF 1
	PHONE JACK	KLS1-TSJ3.5-030	A4	SCALE
			TOLERANCES	VER
			±0.15 ±1.5'	3:1 1

DESIGNER  
 BY CHECK  
 BY APPROVED  
 NINGBO KLS ELECTRONIC CO.,LTD