


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



NOTES1:

UL Standard

- 1.Rated voltage/current : 150V / 7A
- 2.Withstanding voltage : AC1300V/1Min.
- 4.Wire range : 22~18AWG(sol)

IEC Standard

1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	4.0KV	4.0KV	4.0KV
Rate voltage(V)	630V	320V	250V
Rate current(A)		6A	





- 2.Wire range : 0.5~1.0mm²(sol)

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 2.1mm, Poles : 08P
- 3.Stripping length : 5~6mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						
Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150 TO 200	Over 200 TO 250	Over 250 TO 300	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

- 6.RoHS Compliance

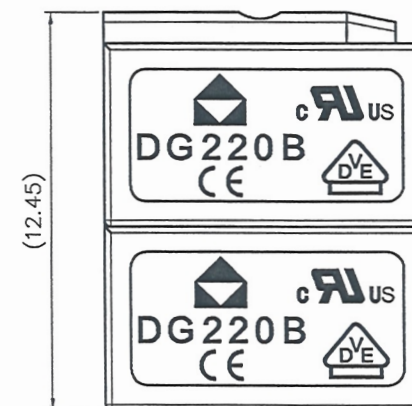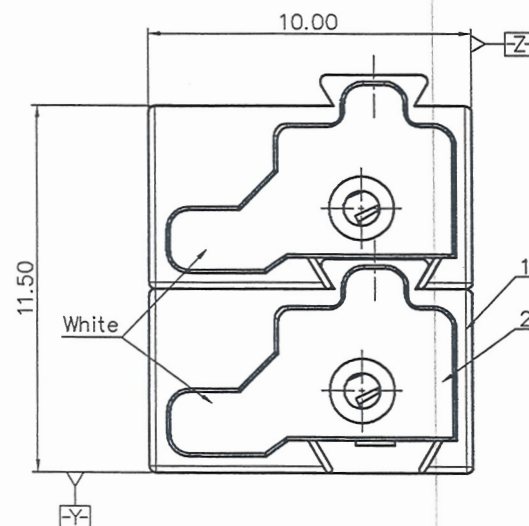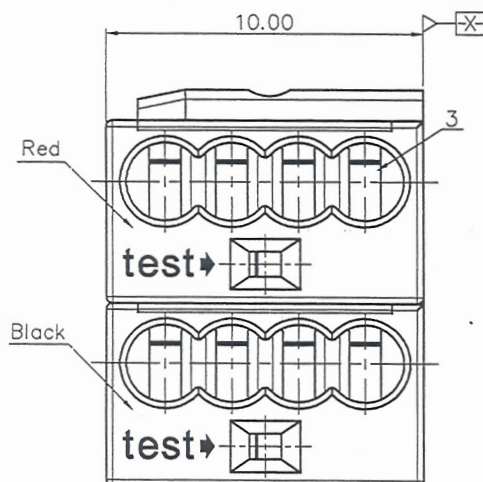

3	Current carrier	Copper alloy	Sn Plated
2	Cover	PA66	UL94-V0
1	Housing	PA66	UL94-V0
ITEM	NAME OF PART	MATERIAL	NOTES

PART NO.: /		NINGBO DEGSON ELECTRICAL CO., LTD	
APPD: 2010.10.26		NAME: DG220B-2.1-08P-1Y-02A(H)	
CHKD: 2010.10.26		TITLE: CUSTOMER DRAWING	
DRFT: MEK 09/12/16"		REV	
THIRD ANGLE PROJECTION		TO	
		DRAWING NO.: DG220B-2.1-C03	
		SHEET	
		DO NOT SCALE DRAWING	
		SCALE	
		1:1	