

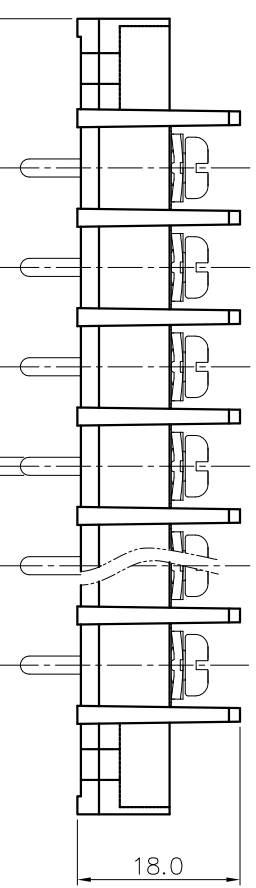





REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

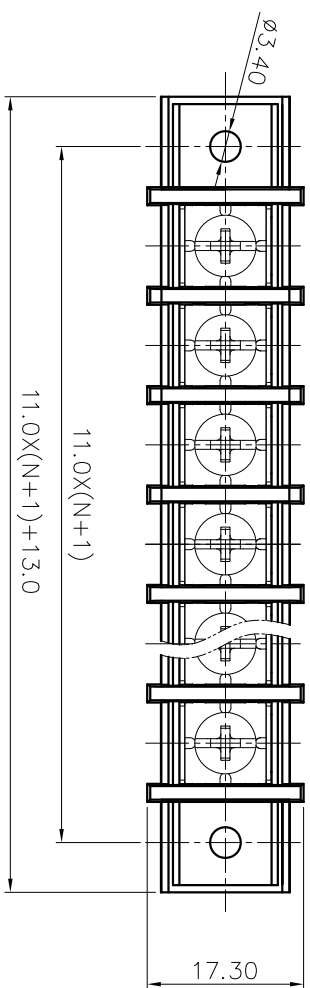

Pitch range	in mm	in mm	Over	Over	Over	Over	Over
6	10	30	60	100	150	0.1/10	
TO	TO	TO	TO	TO	TO		
6	10	24	30	60	150		
±0.15±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6. RoHS Compliance

- NOTES1:
UL Standard
1. Rated voltage/current : 300V / 20A
2. Torque value : M4 , 10.53lb.in
3. Wire range : 22~12AWG
- NOTES2:
1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 11.0mm, Poles = N=02~20P
3. Withstanding voltage : AC1600V/1Min
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

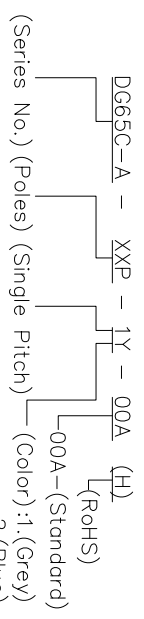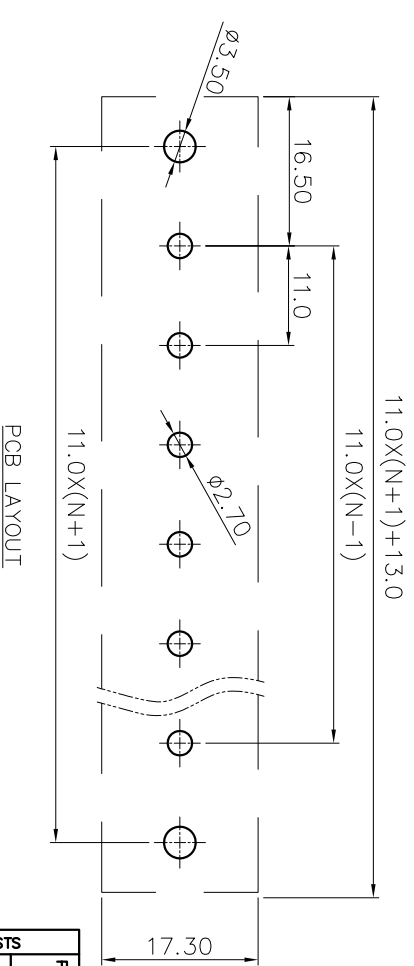

- 00A-(Standard)
1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

DETACHED LISTS			
PART NO.:	/	NAME:	NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	DEGSON®	宁波高松电子有限公司
CHKD:	/	NAME:	DG65C-A-XXP-1Y-00A(H)
DRFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
		SCALE	1:1