

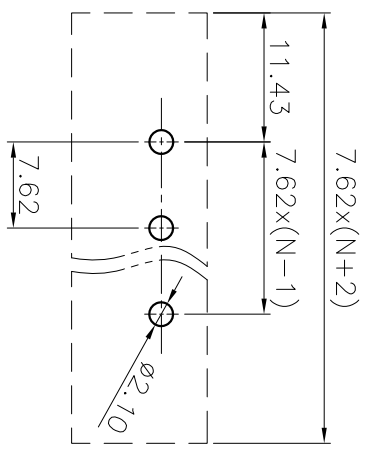
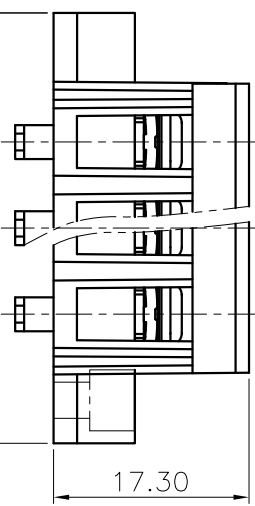



(W/O COVER)

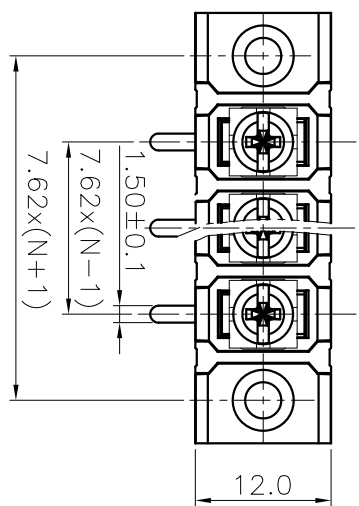

PCB LAYOUT

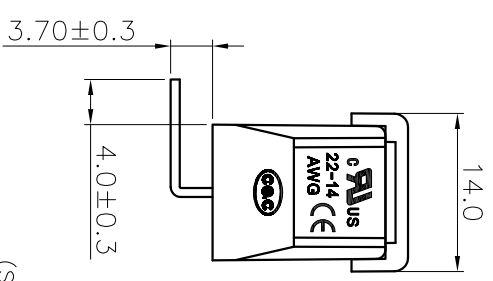

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:


- UL Standard
- 1. Rated voltage/current : 300V / 15A
- 2. Torque value : M3 , 4.43Lb.in
- 3. Wire range : 22~14AWG

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 7.62mm, Poles : N=02~24P
- 3. Withstanding voltage : AC1600V/1Min
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch range	in		mm		Nominal dimension range	in	mm
	Over	TO	Over	TO			
6	10	TO	30	60	100	150	0.1/10
10	24	TO	30	60	100	150	<
15	30	TO	50	70	100	±1.30	±2°

6. RoHS Compliance

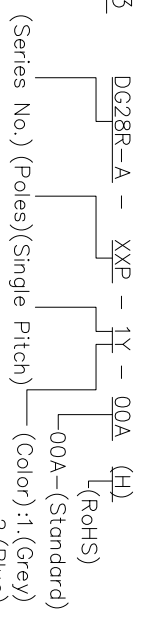

- (Series No.) (Poles) (Single Pitch) (Color) : 1. (Grey) 2. (Blue) 3. (Black) 4. (Green) 5. (Orange) 6. (Red) 7. (Transparent) 8. (Yellow) 9. (White)

DETACHED LISTS			
PART NO.:	/	NAME:	<b>DEGSON</b> 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	TITLE:	DG28R-A-XXP-1Y-00A(H)
CHKD:	/	CUSTOMER DRAWING	REV DO
DRFT:	/	DRAWING NO.:	SHEET 1/1
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE 1:1