
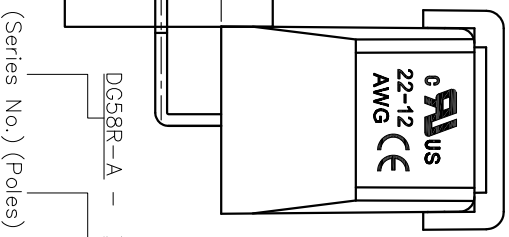
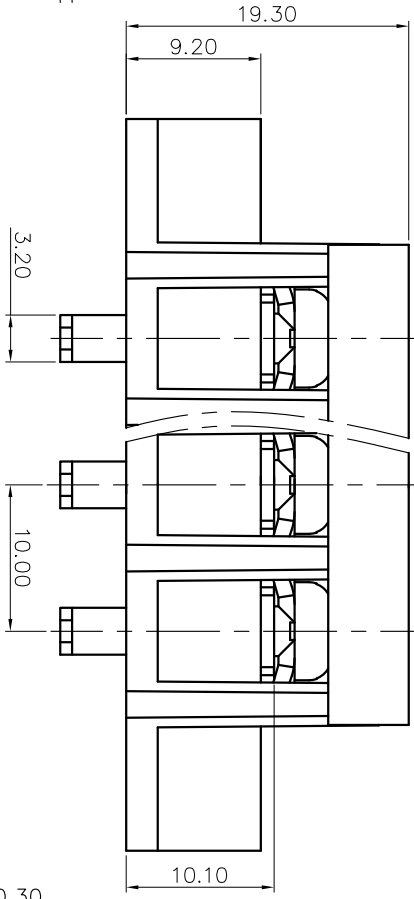
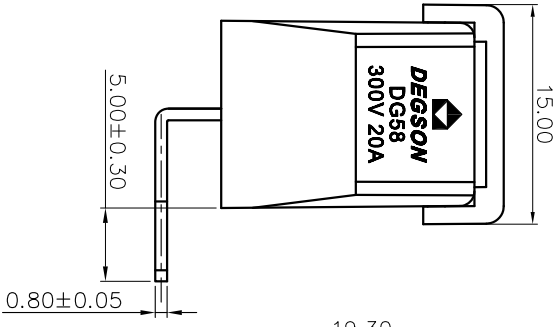


| REVISION RECORD |     |             |           |
|-----------------|-----|-------------|-----------|
| REV             | ECN | DESCRIPTION | DRFT DATE |
|                 |     |             |           |

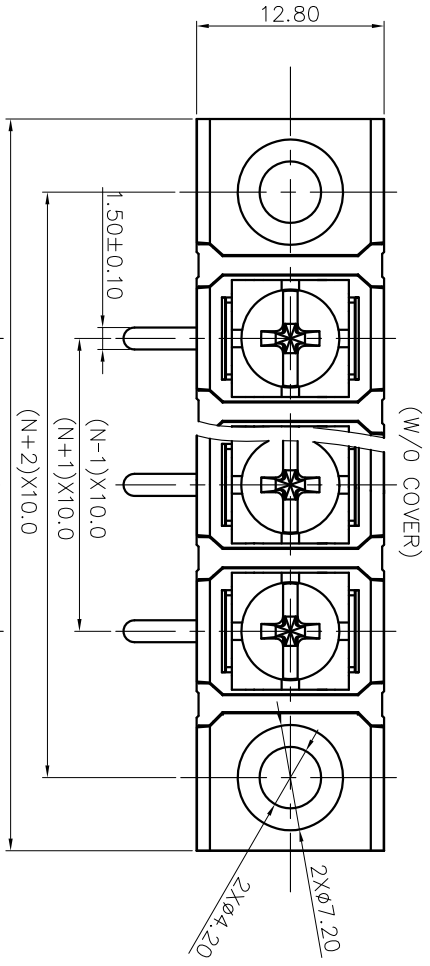


(Series No.) (Poles) (Single Pitch) (Color): 1.(Grey)  
 2.(Blue)  
 3.(Black)  
 4.(Green)  
 5.(Orange)  
 6.(Red)  
 7.(Transparent)  
 8.(Yellow)  
 9.(White)

| Pitch range in mm | Nominal dimension range |       |       |
|-------------------|-------------------------|-------|-------|
|                   | Over                    | Over  | Over  |
| 6                 | 10                      | 30    | 60    |
| 10                | 10                      | 60    | 100   |
| 10                | 24                      | 30    | 150   |
| ±0.15±0.20±0.30   | ±0.30±0.50±0.70         | ±1.00 | ±1.30 |

6. RoHS Compliance

- NOTES1:  
 UL Standard  
 1. Rated voltage/current : 300V / 20A  
 2. Torque value : M4 , 10.53lb.in  
 3. Wire range : 22~12AWG
- NOTES2:  
 1. Dimension shall be interpreted per ASME Y14.5-2009  
 2. Pitch : 10mm, Poles : N=02~20P  
 3. Withstanding voltage : AC1600V/1Min  
 4. Operating temperature: -40C~+105C  
 5. Undimensioned tolerances:

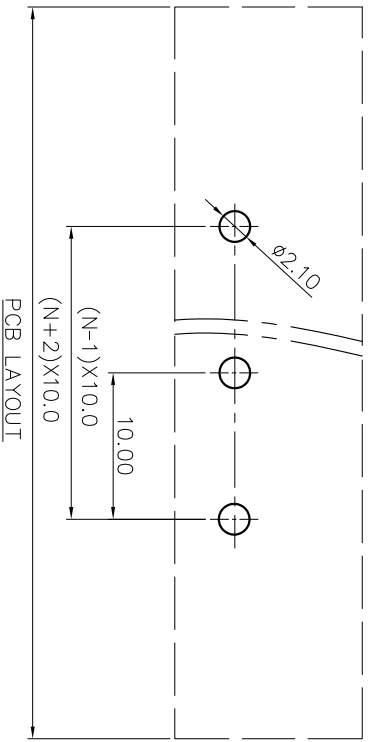

DETACHED LISTS

|           |   |                        |   |       |
|-----------|---|------------------------|---|-------|
| PART NO.: | / | NAME:                  | DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD<br>宁波高松电子有限公司 |       |
| APPD:     | / | TITLE:                 | CUSTOMER DRAWING  |       |
| CHKD:     | / | DRAWING NO.:           | /   | REV   |
| DRFT:     | / | THIRD ANGLE PROJECTION | DO NOT SCALE DRAWING                                    | SCALE |
|           |   |                        | 1:1   | 1:1   |