

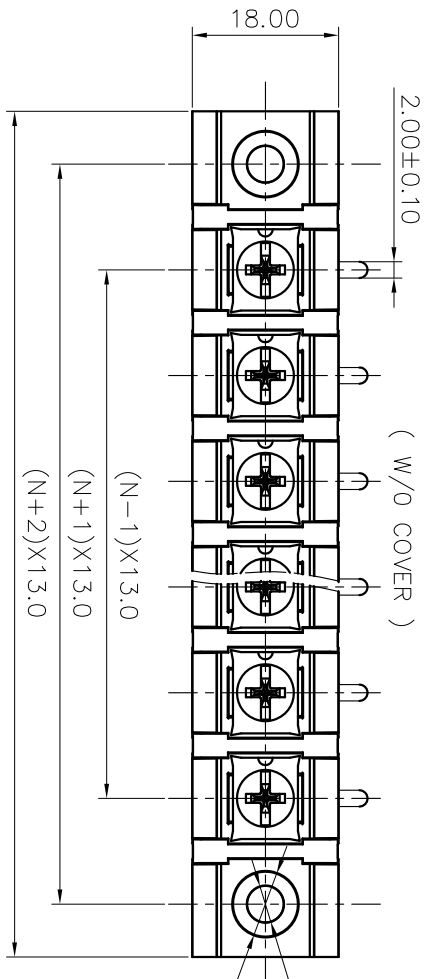



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

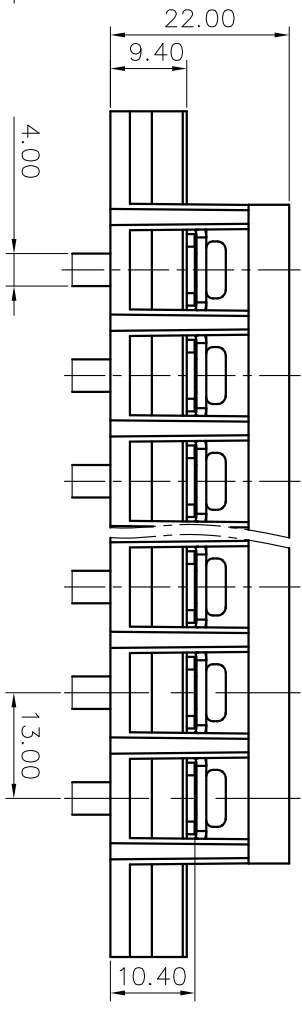


- NOTES1:
UL Standard
1. Rated voltage/current : 300V / 40A
2. Torque value : M4 , 10.53lb.in
3. Wire range : 18~10AWG
- NOTES2:
1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 13.0mm, Poles : N=02~18P
3. Withstanding voltage : AC1600V/1min
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

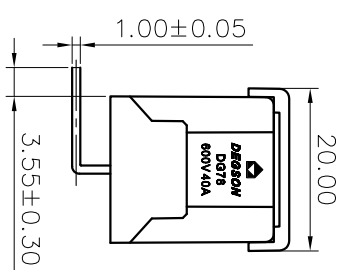

Pitch range	in		mm		Nominal dimension range	in	mm
	Over	TO	Over	TO			
6	10	10	30	60	Over	150	0.1/10
10	24	30	60	100	TO	150	∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
±2°							

6. RoHS Compliance

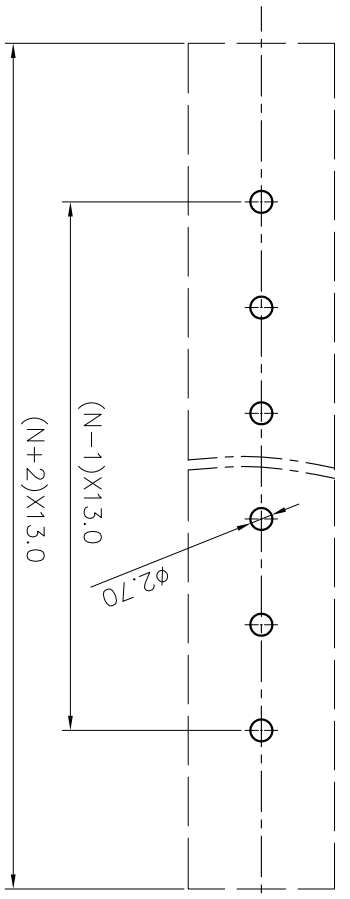

DG78R-A - XXP - 1Y - 00A (H)
(Series No.) (Poles) (Single Pitch) (Color) : 1. (Grey) (RoHS)
2. (Blue)
3. (Black)
4. (Green)
5. (Orange)
6. (Red)
7. (Transparent)
8. (Yellow)
9. (White)

PCB LAYOUT

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	TITLE:	DG78R-A-XXP-1Y-00A(H)
CHKD:	/	CUSTOMER DRAWING	REV DO
DRFT:	/	DRAWING NO.:	SHEET 1/1
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE 1:1

A 8 7 6 5 4 3 2 1