
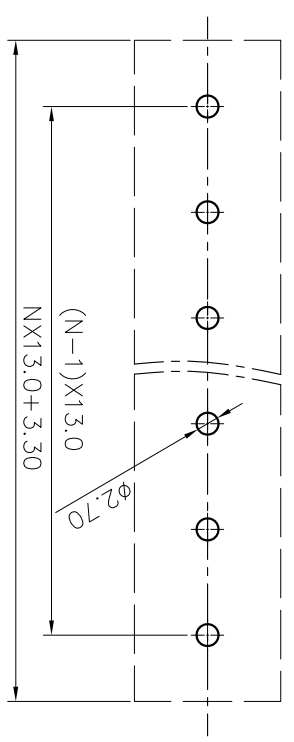
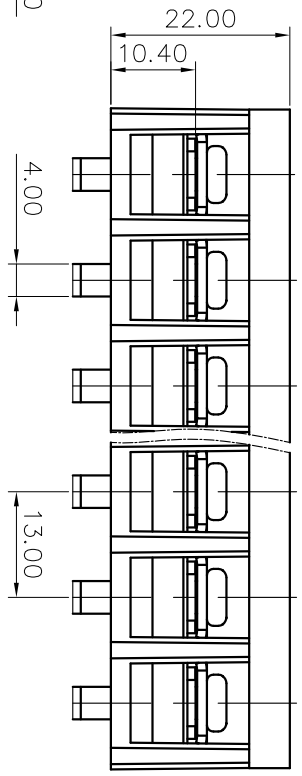
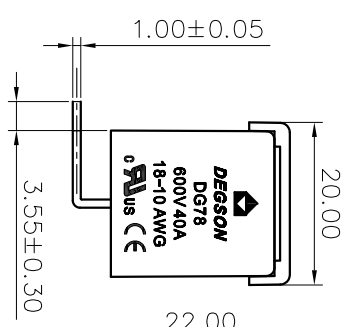


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

2.00±0.10 (w/o COVER)

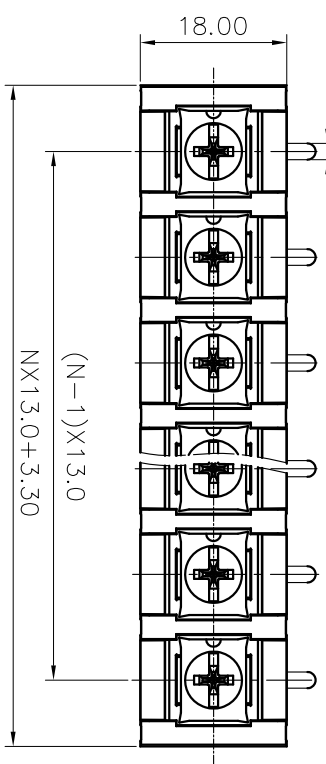

- NOTES1:
UL Standard
1. Rated voltage/current : 300V / 40A
2. Torque value : M4 , 10.53Lb.in
3. Wire range : 18~10AWG
- NOTES2:
1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 13.0mm, Poles : N=02~20P
3. Withstanding voltage : AC1600V/1Min
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:
6. RoHS Compliance

Pitch range	in		mm		Nominal dimension range		in	mm
	Over	TO	Over	TO	Over	Over		
6	10	TO	30	TO	60	100	150	0.1/10
10	TO	24	30	TO	60	100	150	<
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

DG78R-B - XXP - 1Y - 00A (H)
(Series No.) (Poles) (Single Pitch) (Color) : 1.(Grey)
(RoHS)
00A - (Standard)

- 2. (Blue)
- 3. (Black)
- 4. (Green)
- 5. (Orange)
- 6. (Red)
- 7. (Transparent)
- 8. (Yellow)
- 9. (White)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	CHKD:	/
DRFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
			1:1

A B C D E F G H

8 7 6 5 4 3 2 1