

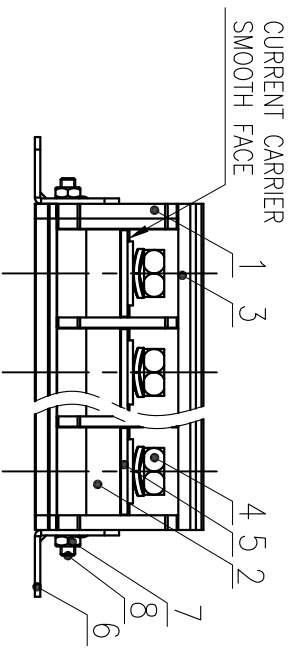


Pitch	Over	Nominal	Over	Over	Over	Over
6	10	24	30	60	100	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
						±1.30
						±2

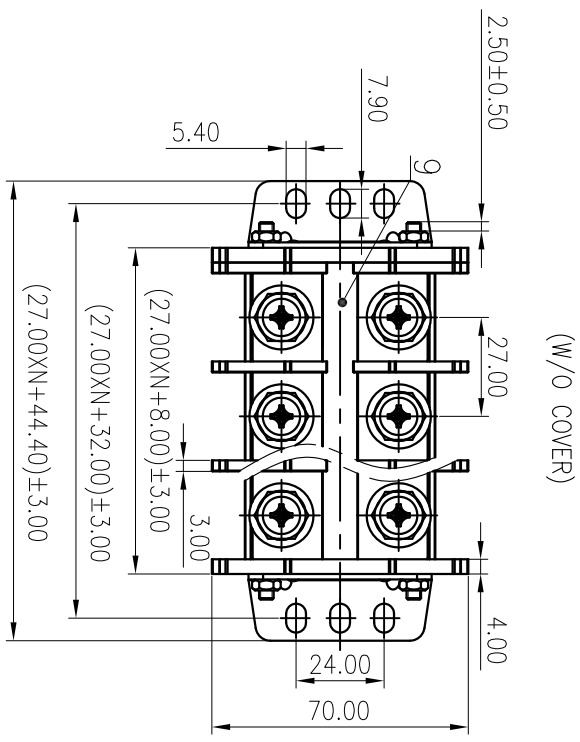

CURRENT CARRIER
SMOOTH FACE

(W/O COVER)

ITEM	NAME OF PART	MATERIAL	NOTES
9	TAG	PVC	UL94V-0
8	CONNECT PILLAR	STAINLESS STEEL	
7	NUT	STEEL	Zn PLATED
6	FASTENER	SPCC	Zn PLATED
5	CURRENT CARRIER	COPPER ALLOY	NI PLATED
4	SCREWS	STEEL	M8/Zn PLATED
3	COVER	PC	UL94V-2
2	HOUSING1	PC	UL94V-0
1	HOUSING2	PC	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/15	600/15	600/5
IEC 标准/IEC Standard:	5	5	5
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	1000/15	1000/15	1000/15
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M8, 4.5/40.00		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.5~70.0/20~2/0		
间距/Pitch/间距范围/Poles	27.00/N=01~12P		
使用温度范围/Operating Temperature Range	-40~125		
符合标准/Requirement	符合GB19830-2005		

NAME: DGR150-XXP-1Y-20A(H)

DRFT:	LJB	2018.04.03	SIZE: A4	SCALE: 1:2	REV	TO
CHKD:						
APPD:						
DRAWING NO.:	DGR150-C04					
TYPE:	CUSTOMER DRAWING					
REV	ECN	DESCRIPTION	DRFT	DATE	SHEET	1/1