



Features

- Constant voltage and current output
- Universal AC input 100∼305VAC
- Built-in active PFC function
- High efficiency
- Protections: Short circuit/Over voltage/Over load/Over temperature
- Over temperature Protection: Shut down and latch off o/p voltage, re-power on to recover
- Cooling by free air convection
- Digital, analog or remote control dimming function
- Suitable for LED lighting and LED Electronic display applications
- IP66/67 with Vo/Lo adjusting screws, internal use, avoid ultraviolet irradiation IP67 without Vo/Lo adjusting screws, external use
- Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations











1P67







■ General functions

Output Power	100W	Input Frequency	50/60Hz
Input Voltage Range	100∼305Vac	Operating Temperature	-40℃~+60℃
Storage Temperature	-45℃~+85℃	Safety & EMC	UL8750,IEC61347,EN55015
Turn-on Delay Time	3.0S max.	Inrush Current	65A
Over Temp Protection	Shut down and latch off o/p voltage	Waterproof	IP66/IP67



■ Detailed Specification

DR100 Series 100W Single Output LED Driver

TABLE 1:

		DR100-	DR100-	DR100-	DR100-	DR100-	DR100-					
	Model	286S035	143S070	096S105	072S140	054S180	048S200					
	DC Voltage	286Vdc	143Vdc	96Vdc	72Vdc	54Vdc	48Vdc					
	Constant Current Range	172~286Vdc	86~143Vdc	58∼96Vdc	44~72Vdc	33~54Vdc	29~48Vdc					
	Rated DC Current	350mA	700mA	1050mA	1400mA	1800mA	2000mA					
Ou stan cut	Dimming Current Range	10~100%rated output current (≥50% rated output voltage)										
Output	Ripple and Noise	10%Vo	10%Vo	10%Vo								
	Voltage Tolerance	±5%	±5%	±5%	±5%	±5%	±5%					
	Voltage Line Regulation	±1%	±1%	±1%	±1%	±1%	±1%					
	Voltage Load Regulation	±5%	±5%	±5%	±5%	±5%	±5%					
	Efficiency	92%	91%	91%	91%	91%	91%					
la a cot	Pow er Factor	0.96/220Vac	0.96/220Vac	0.96/220Vac	0.96/220Vac	0.96/220Vac	0.96/220Vac					
Input	AC Current	1.3A/100VAC,0.6A/220VAC										
	Leakage Current	<0.75mA/230V	AC;<0.5mA/120	VAC								
	Over Current	Constant current limiting										
Protection	Short Circuit	Non-dimmer type	: recover automat	ically at hiccup ;C	immer type: Short	-circuit pow er ≤	10W.					
	Over Voltage	Shut down at 1	40%Vo and latc	h off o/p voltage	, re-power on to	recover						
	Operating Humidity	20∼95%RH,no	on-condensing									
	Storage Humidity	10∼95%RH										
Environmental	Temperature Coefficient	±0.03%/°C (0~50°C)										
	Vibration	10∼300HZ,1G	,Period for 60m	in,each along	√、Y、Zaxes.							
	Withstand Voltage	VP-OP:3.75KVAC	; IP-FG:1.56KAC/2	2.00KVAC(remov	e discharge tube)	; O/P-FG:2.00KV	/C					
	Isolation Resistance	IP-OP,IP-FG,O/	P-FG:100MOhm	ns/500VDC/25°0	C/70%RH							
Safety& EMC	EMC Interference	Compliance to	EN55015, EN	55022 (CISPR	22) Class B							
	EMC Emission	Compliance to EN61000-3-2 Class C (≥50%load) ;EN61000-3-3										
	EMC Immunity	Compliance to	EN61000-4-2,3	,4,5,6,8,11;EN\	/50204,EN615	547,EN55024,	,					
	Authentication	UL/CE										
	MTBF	500Khrs										
Others	Dimensions (mm)	196×68×40										
	Max. Case Temp.	Tc max=80°C										
	Net Weight	0.941Kg/pcs										
	1. All parameters NOT speciall											
	 Ripple & noise are measure Tolerance : includes set up to 			•	minated with a 0.1uf	& 47uf parallel capa	acitor.					
	4. Constant current operation region is within 60% ~100% rated output voltage. This is the suitable operation region for LED related applications, but please reconfirm special electrical requirements for some specific system design.											
Note	5. Derating may be needed un				cs for more details.							
	6. Safety and EMC design ref					of thet · · · ·						
	 7. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time. 8. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. 											

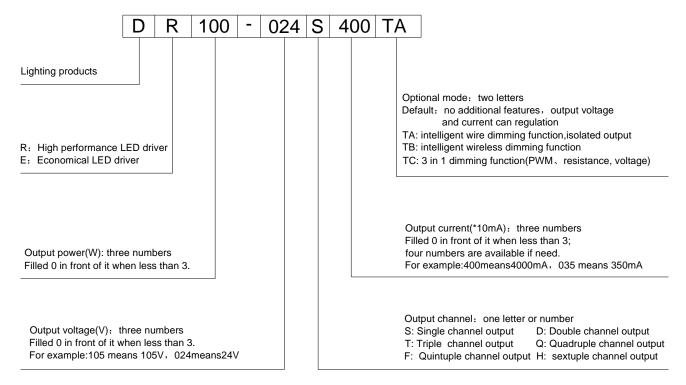


TABLE 2:

	Model	DR100- 042S230	DR100- 036S265	DR100- 030S320	DR100- 027S357	DR100- 024S400	DR100- 012S833					
	DC Valtage											
	DC Voltage	42Vdc	36Vdc	30Vdc	27Vdc	24Vdc	12Vdc					
	Constant Current Range	26∼42Vdc	22~36Vdc	18∼30Vdc	17∼27Vdc	15∼24Vdc	8~12Vdc 8330mA					
	Rated DC Current	2300mA 2650mA 3000mA 3570mA 4000mA										
Output	Dimming Current Range	10~100%rated output current (≥50% rated output voltage)										
,	Ripple and Noise	10%Vo	10%Vo	10%Vo	10%Vo	10%Vo	10%Vo					
	Voltage Tolerance	±5%	±5%	±5%	±5%	±5%	±5%					
	Voltage Line Regulation	±1%	±1%	±1%	±1%	±1%	±1%					
	Voltage Load Regulation	±5%	±5%	±5%	±5%	±5%	±5%					
	Efficiency	91%	90%	90%	90%	90%	88%					
lanut	Pow er Factor	0.96/220Vac	0.96/220Vac	0.96/220Vac	0.96/220Vac	0.96/220Vac	0.96/220Vac					
Input	AC Current	1.3A/100VAC,0.6A/220VAC										
	Leakage Current	<0.75mA/230V	AC;<0.5mA/120	VAC								
	Over Current	Constant curre	nt limiting									
Protection	Short Circuit	Non-dimmer type	: recover automat	tically at hiccup ;C	Dimmer type: Short	-circuit pow er ≤	ircuit pow er ≤10W.					
	Over Voltage	Shut down at 1	40%Vo and late	h off o/p voltage	e, re-power on to	recover						
	Operating Humidity	20∼95%RH,n	on-condensing									
	Storage Humidity	10∼95%RH										
Environmental	Temperature Coefficient	±0.03%/℃ (0~50℃)										
	Vibration	10∼300HZ,1G	Period for 60m	nin,each along 2	X、Y、Zaxes.							
	Withstand Voltage	√P-OP:3.75KVAC	; IP-FG:1.56KAC/	2.00KVAC(remov	e discharge tube)	; O/P-FG:2.00KV	AC .					
	Isolation Resistance	IP-OP,IP-FG,O/	P-FG:100MOhm	ns/500VDC/25°	C/70%RH							
Safety& EMC	EMC Interference	Compliance to EN55015, EN55022 (CISPR22) Class B										
	EMC Emission	Compliance to EN61000-3-2 Class C (≥50%load) ;EN61000-3-3										
	EMC Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11;ENV50204, EN61547, EN55024,										
	Authentication	UL/CE										
	MTBF	500Khrs										
Others	Dimensions (mm)	196×68×40										
	Max. Case Temp.	Tc max=80°C										
	Net Weight	0.941Kg/pcs										
	All parameters NOT speciall	<u> </u>	asured at 230VAC in	put, rated load and 2	25 of ambient tempe	rature.						
		ed: at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.										
	Constant current operation at the constant current operation.		_		suitable operation red	ion for LED related	annlications but					
	4. Constant current operation region is within 60% ~100% rated output voltage. This is the suitable operation region for LED related applications, but please reconfirm special electrical requirements for some specific system design.											
Note	5. Derating may be needed un											
	 Safety and EMC design ref Length of set up time is me 				-	of the set up time						
	8. The power supply is consider by the complete installation, the complete installation is the complete installation.	ered as a component	that will be operated	d in combination with	final equipment. Sir	nce EMC performanc						




■ Part number code




For example: DR100-024S400TA means it is a high performance LED driver, output power 100W, output voltage 24Vdc, output current 4000mA, single output, with intelligent wire dimming function and isolated output.

■ wiring diagram

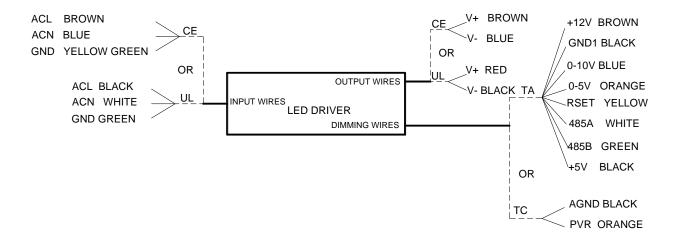




■ Derating Curve

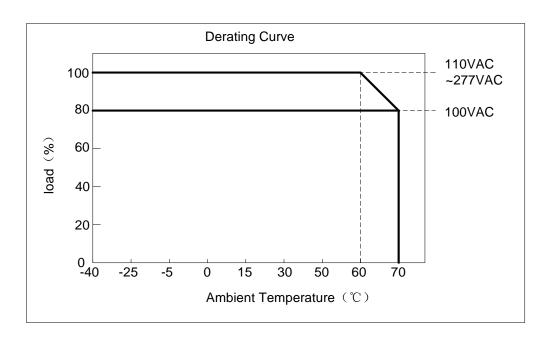


■Static Characteristics

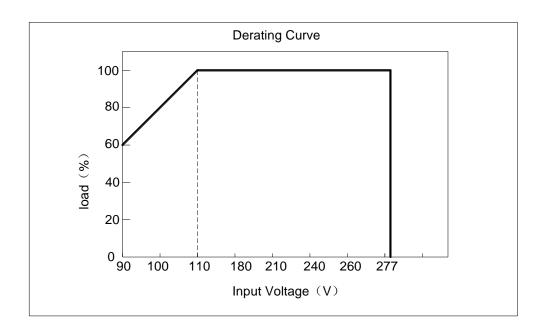





■Power Factor Characteristic

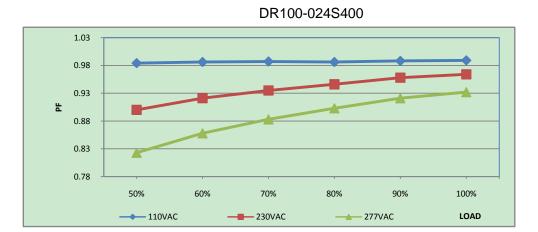

■EFFICIENCY vs LOAD

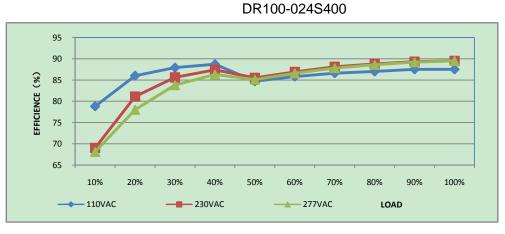


■Typical LED power supply I-V curve

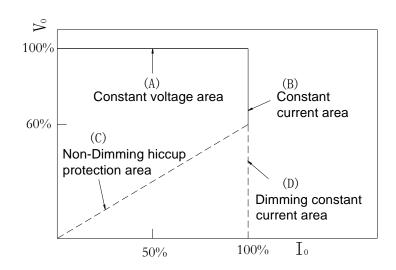



■ Mechanical Outline

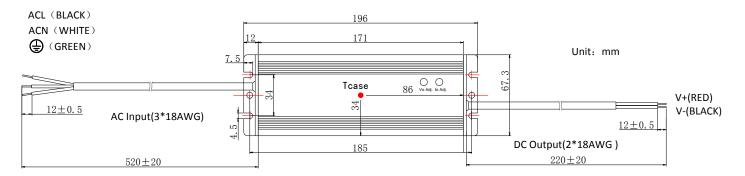

XTcase: Max. Case Temperature




 $\mbox{\%}$ Power's internal temperature is 15 $\mbox{\%}$ warmer than case temperature.

■ Isolated intelligent dimming and control

intelligent dimming

Derating Temperature Protection

LED Light attenuation compensation

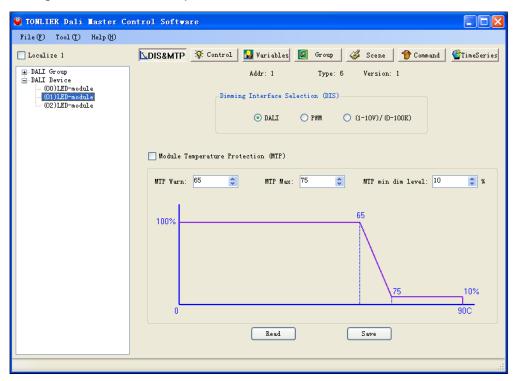

Programming Tool: Please refer to www.tonlier.com for downloading .



DR100 Series

100W Single Output LED Driver

■Non-isolated 3 in 1 dimming function

Reference resistance value for output current adjustment (Typical)

Resistance	Single	driver	10ΚΩ	20ΚΩ	30K Ω	40ΚΩ	50ΚΩ	60ΚΩ	70ΚΩ	80ΚΩ	90ΚΩ	100ΚΩ	OPEN
value	Multiple	drivers	10K Ω /N	20K Ω /N	30K Ω /N	40K Ω /N	50K Ω /N	60K Ω /N	70KΩ /N	80KΩ /N	90K Ω /N	100KΩ /N	OPEN
Percentage	of rated	current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	98%~108%

1 ~ 10V dimming function for output current adjustment (Typical)

Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	98%~108%

10V PWM signal for output current adjustment (Typical): Frequency range: 100HZ ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	98%~108%

■Input and output Dielectric strength

Isolation	Input Wires	Output Wires	Isolated Dimming Control Wires	Chassis
Input Wires	NA	3750	2000	1560/2000(remove discharge tube)
Output Wires	3750	NA	2000	2000
Isolated Dimming Control Wires	2000	2000	NA	2000
Chassis	1560/2000(remove discharge tube)	2000	2000	NA

■Fixed derating-cutoff type temperature protection

