LCD / LCM SPECIFICATION



WINSTAR Display Co.,Ltd. 華凌光電股份有限公司

Winstar Display Co., LTD 華凌光電股份有限公司



WEB: https://www.winstar.com.tw E-mail: sales@winstar.com.tw

SPECIFICATION

CUSTOMER :	~ ()
MODULE NO.:	WH1602S-YYH-JT#

APPROVED	BY:
----------	-----

(FOR CUSTOMER USE ONLY)

PCB VERSION:

DATA:

SALES BY	APPROVED BY	CHECKED BY	PREPARED BY
25			

VERSION	DATE	REVISED PAGE NO.	SUMMARY
F	2019/08/27		Modify Material List of Components for RoHs



MODLE NO:

華凌光電股份有限公司

RECORDS OF REVISION

DOC. FIRST ISSUE

VERSION	DATE	REVISED PAGE NO.		SUMMARY
0	2007/02/27		Fir	rst issue
A	2010/06/04		Co	rrect VDD-VO
В	2011/01/17		Co	rrect pin16=NC
C	2013/07/19		Re	move IC information
			Mo	odify B/L information
			and	d Vop
D	2014/07/02	\C	Co	rrect
			PC	² B->FR=3.25mm.
E	2016/01/27		Mo	odify Precautions in use
			of	LCD Modules
			&	Static electricity test
F	2019/08/27		Mo	odify Material List of
			Co	mponents for RoHs

Contents

- 1.Module Classification Information
- 2.Precautions in use of LCD Modules
- 3.General Specification
- 4. Absolute Maximum Ratings
- 5. Electrical Characteristics
- 6. Optical Characteristics
- 7.Interface Pin Function
- 8. Contour Drawing & Block Diagram
- 9. Character Generator ROM Pattern
- 10.Reliability
- 11.Backlight Information
- 12.Inspection specification
- 13. Material List of Components for RoHs
- 14.Recommendable Storage

1. Module Classification Information

Η 1602 <u>S</u> <u>Y</u> Y Η JT# (2) (4) (5) (7)

① Brand: WINSTAR DISPLAY CORPORATION

② Display Type: H→Character Type, G→Graphic Type, T→TAB Type

3 Display Font: Character 16 words, 02 Lines.

Model serials no.

L→LED, Full color S Backlight N→Without backlight $T\rightarrow$ LED, White

J→DIP LED,Blue Type: B→EL, Blue green A→LED, Amber

> K→DIP LED, White D→EL, Green $R\rightarrow LED$, Red

E→DIP LED, Yellow Green W→EL, White O→LED, Orange

M→EL, Yellow Green G→LED, Green H→DIP LED, Amber

I→DIP LED, Red F→CCFL, White $P \rightarrow LED$, Blue

Y→LED, Yellow Green X→LED, Dual color

C→LED, Full color G→LED, Green

V-FSTN Negative, Blue ⑥ LCD Mode : B→TN Positive, Gray

> N→TN Negative, T→FSTN Negative, Black

L→VA Negative D→FSTN Negative (Double film)

H→ HTN Positive, Gray F→FSTN Positive I→HTN Negative, Black K→FSC Negative

U→HTN Negative, Blue S→FSC Positive

M→STN Negative, Blue E→ISTN Negative, Black G→STN Positive, Gray C→CSTN Negative, Black

Y→STN Positive, Yellow Green A→ASTN Negative, Black

 $F \rightarrow Transmissive, N.T, 12:00$

② LCD Polarizer A→Reflective, N.T, 6:00 H→Transflective, W.T,6:00

D-Reflective, N.T, 12:00 K→Transflective, W.T,12:00 Type/

 $G \rightarrow Reflective, W. T, 6:00$ C→Transmissive, N.T,6:00 **Temperature**

J→Reflective, W. T, 12:00

direction B→Transflective, N.T,6:00 I→Transmissive, W. T, 6:00

> E→Transflective, N.T.12:00 L→Transmissive, W.T,12:00

Special Code JT:English and Japanese standard font

#:Fit in with the ROHS Directions and regulations

range/ View

2.Precautions in use of LCD Modules

- (1) Avoid applying excessive shocks to the module or making any alterations or modifications to it.
- (2)Don't make extra holes on the printed circuit board, modify its shape or change the components of LCD module.
- (3)Don't disassemble the LCM.
- (4)Don't operate it above the absolute maximum rating.
- (5)Don't drop, bend or twist LCM.
- (6) Soldering: only to the I/O terminals.
- (7)Storage: please storage in anti-static electricity container and clean environment.
- (8) Winstar have the right to change the passive components, including R3,R6 & backlight adjust resistors. (Resistors, capacitors and other passive components will have different appearance and color caused by the different supplier.)
- (9) Winstar have the right to change the PCB Rev. (In order to satisfy the supplying stability, management optimization and the best product performance...etc, under the premise of not affecting the electrical characteristics and external dimensions, Winstar have the right to modify the version.)
- (10) To ensure the stability of the display screen, please apply screen saver after showing 30 mins of fixed display content.

*** WINSTAR

3.General Specification

Item	Dimension	Unit
Number of Characters	16 characters x 2Lines	_
Module dimension	59.0 x 29.3 x 5.5 (MAX)	mm
View area	52.0 x 15.0	mm
Active area	46.7 x 9.84	mm
Dot size	0.45 x 0.54	mm
Dot pitch	0.50 x 0.59	mm
Character size	2.45 x 4.67	mm
Character pitch	2.95 x 5.17	mm
LCD type	STN Positive, Yellow Green Transflective (In LCD production, It will occur slightly color of can only guarantee the same color in the same based on the same based of the same based of the same based on the same	
Duty	1/16	
View direction	6 o'clock	
Backlight Type	LED Yellow Green	
IC	ST7066U	


4.Absolute Maximum Ratings

Item	Symbol	Min	Тур	Max	Unit
Operating Temperature	Тор	-20	_	+70	$^{\circ}\!\mathbb{C}$
Storage Temperature	T _{ST}	-30	_	+80	$^{\circ}\!\mathbb{C}$
Input Voltage	VI	V _{SS}	_	V_{DD}	V
Supply Voltage For Logic	V _{DD} -V _{SS}	-0.3	_	7	V
Supply Voltage For LCD	V_{DD} - V_{o}	-0.3	_	13	V

5.Electrical Characteristics

Item	Symbol	Condition	Min	Тур	Max	Unit
Supply Voltage For Logic	V_{DD} - V_{SS}	_	4.5	5.0	5.5	V
Supply Voltage For LCD		Ta=-20°C	_	_	_	V
*Note	V_{DD} - V_{0}	Ta=25°C	3.6	3.7	3.8	V
		Ta=70°C	_	_	(V
Input High Volt.	$V_{ m IH}$	_	0.7 V _{DD}	_	V_{DD}	V
Input Low Volt.	V_{IL}	_	Vss	^− C	0.6	V
Output High Volt.	V_{OH}	_	3.9		V_{DD}	V
Output Low Volt.	V_{OL}	-	0	_	0.4	V
Supply Current	I_{DD}	V _{DD} =5.0V	1.0	1.2	1.5	mA


^{*} Note: Please design the VOP adjustment circuit on customer's main board




6.Optical Characteristics


Item	Symbol	Condition	Min	Тур	Max	Unit
	θ	CR≧2	0	_	20	$\phi = 180^{\circ}$
View Angle	θ	CR≧2	0	_	40	$\phi = 0^{\circ}$
	θ	CR≧2	0	_	30	$\phi = 90^{\circ}$
	θ	CR≧2	0	_	30	$\phi = 270^{\circ}$
Contrast Ratio	CR	_	—	3	_	_
р ш	T rise	_	_	150	200	ms
Response Time	T fall	_	_	150	200	ms


Definition of Operation Voltage (Vop)



Definition of Response Time (Tr, Tf)








Conditions:

Operating Voltage: Vop Frame Frequency: 64 HZ Viewing Angle(θ , φ): 0° , 0°

Driving Waveform: 1/N duty, 1/a bias


Definition of viewing angle ($CR \ge 2$)

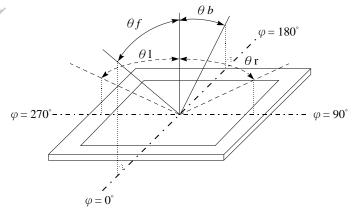


7.Interface Pin Function

Pin No.	Symbol	Level	Description
1	VLED(-)		Power supply for B/L(-)
2	Vss	0V	Ground
3	$V_{ m DD}$	5.0V	Supply Voltage for logic
4	Vo	(Variable)	Operating voltage for LCD
5	RS	H/L	H: DATA, L: Instruction code
6	R/W	H/L	H: Read L: Write
7	Е	H/L	Chip enable signal
8	DB0	H/L	Data bus line
9	DB1	H/L	Data bus line
10	DB2	H/L	Data bus line
11	DB3	H/L	Data bus line
12	DB4	H/L	Data bus line
13	DB5	H/L	Data bus line
14	DB6	H/L	Data bus line
15	DB7	H/L	Data bus line
16	NC) –	No connection

8.Contour Drawing & Block Diagram

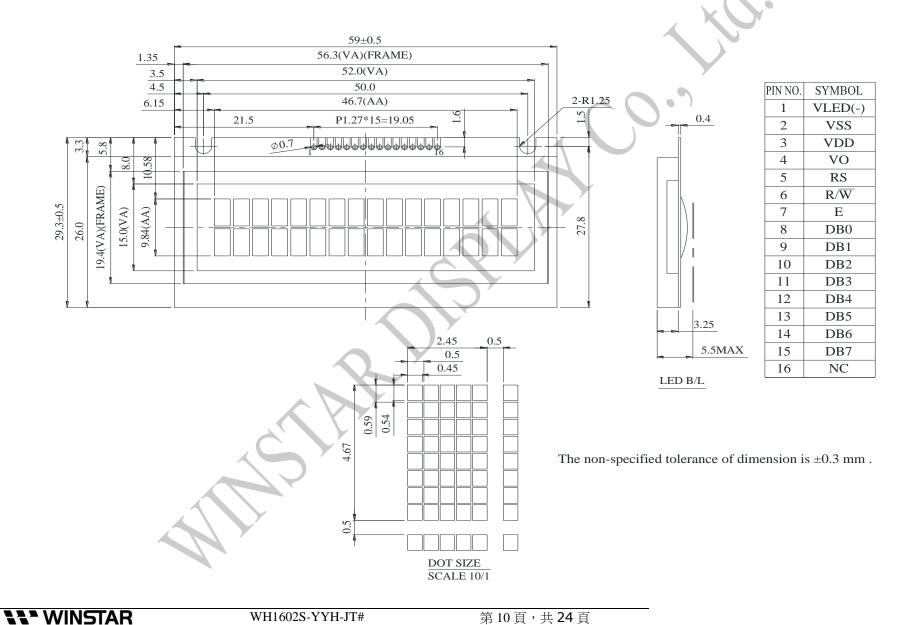

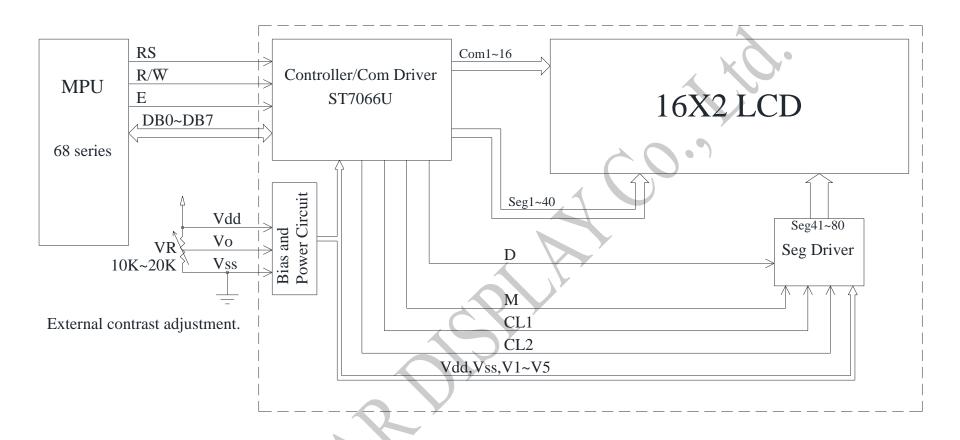

Character located 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 DDRAM address 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F DDRAM address 40 41 42 43 44 45 46 47 48 49 4A 4B 4C 4D 4E 4F

9.Character Generator ROM Pattern

Table.2

Upper 4 bit Lower 4 bit	LLLL	LLLH	LLHL	LLHH	LHLL	LHLH			HLLL	HLLH	HLHL	НГНН	HHLL	HHLH	нннг	нннн
LLLL	CG RAM (1)			5555 55 55 55 55 55 55 55 55	55 55 55 55 55 55 55 55 55 55 55 55 55	5555 5 5 5555 5555 5	5 5	5555 5555 5555 5				55555	55 5	€		646444666 6 6 6 6 6 6 6 6
LLLH	(2)		55 55 55		55 55 55 55 55 55 55 55 55 55 55 55 55		555 5555 5555 5	-			5555 5555 5555	55555 555 555 555 55	55 55 55 55 55 55 55 56	5 5 5 5 5 5 5 5 5	5 5 555 555 555 555	9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9
LLHL	(3)		50 50 50 50	555 5 5 5 5	5 5 5555 5 5 5 5	5 5 5555 5 5 5 5 5 5	55 55 55 55 55 55 55 55 55 55 55 55 55	5 5 5 5 5 5 5			55 5 5 5	5 5 5 5 5 5	55 55 55 55 55 55 55 55	5 5	20000000000000000000000000000000000000	1000 1000 1000 1000
LLHH	(4)		55 55 55 55 55 55 55 55 55 55 55 55 55		5 5 5 5 5		555 55 55 55	555 555 5555 5555			55 55 55 55	5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	555 5555 555 55	55555 55555 55555	555 555 555	55 55 55 55 55 55
LHLL	(5)				55 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5		55 55 55 55 55 55 55	55 55 55 55 55 55		4	5	55555 55 55 55	55555 5555 5555	55 55 55 55 55 55 55 55 55 55 55 55 55	chantenari G G G G G Danten	
LHLH	(6)				55555 5555 5555 5555 5555		555	5 5 5 5 5 5 5 55		8	10 15 10 15	55555 5555 555 555 555	5 5 5 5 5 5 5	555 55 55 55 55		9 99 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9
LHHL	(7)		55 55 55 55 55 55 55 55			55 55 55 55 55 55 55 55	55 5 55 5 55 5 55 5	5 5 5 5 5 5			55555 55555 55555 5	55555555555555555555555555555555555555	555 5555	55555 55555 55555 55555	CANADARA G G G G G G G G	2000 500 500 500 500 500 500 500 500 500
LHHH	(8)		55 55 55	55555 5 5 5	55 5 55 5 55 5 5 55 5 55 5 55 5	55 55 55 55 55 55 55 55 55 55 55 55 55	5555 5555 5555 5555		7		55555 55 55	55 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	55555 5 5 5 5	555 5555 5 5	555	
HLLL	(1)		50 50 50 50 50 50 50 50 50 50 50 50 50 5	5555 5555 5555 5555 5555	55555555555555555555555555555555555555	5 5 5 5 5 5 5 5 5 5	55555555555555555555555555555555555555				5 5 5 5 5	55555 5 5 5 5 5 5	55 55 55 55 55 55 55 55 55 55	55 55 55 55 55 55 55 55 55 55 55 55 55	2000 2000 2000	55555 5555 5555
HLLH	(2)			555 5 5 555 555 555	55 55 55 55 55 55 55	5 55 55 55 55 55 55 55 55 55 55 55 55 5	50 50 50 50 50	5 5 5 5 5 5 5 5 5 5 5			55555 5 5 5 5	-	55 55 55 55 55			
HLHL	(3)	_ (55 55 55 55 55 55 55 55 55 55 55 55 55	55 55 55 55	555 55 55 55 55 55	55555 5 5 5 5	5 55 5 5	55555 5 5			55555 50 55555	55555 5 5 5 5 5 5	5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	55 55 55 55 55 55	4 4 60000000	55555 55555
НГНН	(4)		555555 55555	55 55 55 55 55	50 50 50 50 50 50 50 50 50 50 50 50 50 5	50 50 50 50 50	55555555555555555555555555555555555555	50 50 50 50 50			5555 555 555 55	50 50 50 50 50 50 50 50 50 50 50 50 50 5	5 5 5 5 5 5 5 5 5 5 5	555555 55 55 55 55 55 55 55 55	555	10 10 10 10 10 10 10 10 10 10 10 10 10 1
HHLL	(5)	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	10 10 10 10	5 5 5 5	55 55 55 55 55 55 55	5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	50 50 50 50 50 50	***************************************			55 55 55 55 55 55 55 55	55 5 55 5 55 5	55555 5 5 5		949 9499999 19 19 19	
HHLH	(6)		55555	55555 55555	55555555555555555555555555555555555555	1	55 5 5 5 5 5 5 5 5 5 5	5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5			555 50 5555	55555	5 5 5	55 5 5		5 55555 5
нннг	(7)		원원 원원	5 5 5 5	55555555555555555555555555555555555555	5 5	5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	50 50 50 50 50 50 50 50			5555 5555 5555 5555	55 55 55 55 55 55 55 55 55 55 55		5 5		
нннн	(8)		5	5555 5 5 5	555 55 55 55 55 55 55 55 55	5555	555 5 5 5 5 5 5	5 55555 5 5			5 5 5 5 5 5 5	5 5 5 5 5 5 5	55555 5 5 5 5	55 55 55 55 55 55	2000 2000 2000 2000 2000 2000	######################################

10.Reliability

Content of Reliability Test (Wide temperature, -20°C~70°C)

	Environmental Test								
Test Item	Content of Test	Test Condition	Not e						
High Temperature storage	Endurance test applying the high storage temperature for a long time.	80°C 200hrs ▲	2						
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-30°C 200hrs	1,2						
High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	70°C 200hrs							
Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	-20°C 200hrs	1						
High Temperature/ Humidity storage	The module should be allowed to stand at 60 °C,90%RH max For 96hrs under no-load condition excluding the polarizer, Then taking it out and drying it at normal temperature.	60°C,90%RH 96hrs	1,2						
Thermal shock resistance	The sample should be allowed stand the following 10 cycles of operation -20°C 25°C 70°C 30min 5min 30min 1 cycle	-20°C/70°C 10 cycles							
Vibration test	Endurance test applying the vibration during transportation and using.	Total fixed amplitude: 1.5mm Vibration Frequency: 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes	3						
Static electricity test	Endurance test applying the electric stress to the terminal.	VS= ± 600 V(contact), ± 800 v(air), RS= 330Ω CS= 150 pF 10 times							

Note1: No dew condensation to be observed.

Note2: The function test shall be conducted after 4 hours storage at the normal

Temperature and humidity after remove from the test chamber.

Note3: The packing have to including into the vibration testing.


11.Backlight Information

Specification

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	TEST CONDITION
Supply Current	ILED	32	40	60	mA	V=5.0V
Supply Voltage	V	4.9	5.0	5.1	V	-
Reverse Voltage	VR	_	_	8	V	- 1 10
Luminance (Without LCD)	IV	37.28	46.6	_	CD/M2	ILED=40mA
Life Time	_	_	50000	_	Hr.	V≦5.0V
Color	Yellow Gree	en				

Note: The LED of B/L is drive by current only, drive voltage is for reference only. drive voltage can make driving current under safety area (current between minimum and maximum).

Drive from Pin1, VDD

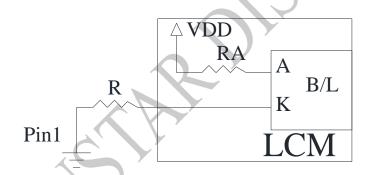

12.Inspection specification

NO	Item	Criterion				AQL
		Missing vertical	, horizonta	al segment, segmen	nt contrast defect.	
		Missing characte	er, dot or	icon.		
		Display malfund	ction.			
01	Electrical	No function or r	no display.			0.65
UI	Testing	Current consum	ption exce	eds product specif	ications.	0.03
		LCD viewing ar	ngle defect	•	~ (
		Mixed product t	ypes.		4	,
		Contrast defect.				
	Black or	2.1 White and h	lack snots	on display <0.25	mm, no more than	
02	white spots on	three white or bl	_		min, no more than	2.5
02	LCD (display		•	•	or lines within 3mm	2.3
	only)	2.2 Delisery spar		ore than two spots	of thies within 5hini	
		3.1 Round type	: As follov	ving drawing		
		$\Phi = (x + y) / 2$		SIZE	Acceptable Q TY	
				Φ ≤ 0.10	Accept no dense	
				$0.10 < \Phi \le 0.20$	2	
				$0.20 < \Phi \le 0.25$	1	2.5
				0.25 < Ф	0	2.3
	LCD black	X	_			
	spots, white	→ —	<u> </u>			
03	spots,	• .	x Y			
	contamination		T			
	(non-display)	3.2 Line type : (As follow	ing drawing)		
	4		Length	Width	Acceptable Q TY	
	7	~ /¥w		$W \leq 0.02$	Accept no dense	
4		→ I I I←	L≦3.0	$0.02 < W \le 0.03$	2	2.5
			L≦2.5	$0.03 < W \le 0.05$		
				0.05 < W	As round type	

04	Polarizer bubbles	If bubbles are visible, judge using black spot specifications, not easy to find, must check in specify direction.	Size Φ $Φ \le 0.20$ $0.20 < Φ \le 0.50$ $0.50 < Φ \le 1.00$ $1.00 < Φ$ Total Q TY	Acceptable Q TY Accept no dense 3 2 0 3	2.5
----	----------------------	---	---	---	-----

NO	Item	Criterion			AQL
05	Scratches	Follow NO.3 LCD blace	ek spots, white spots, co	ntamination	
		Symbols Define: x: Chip length y	: Chip width z: Ch	iip thickness	
			Glass thickness a: LC	=	
		L: Electrode pad length		D side length	
		2. Electrode pad length	•		
		6.1 General glass chip:	:		
		6.1.1 Chip on panel sur	face and crack between	panels:	
			N X X		
		z: Chip thickness	y: Chip width	x: Chip length	
06	Chipped	Z≦1/2t	Not over viewing area	x ≤ 1/8a	2.5
	glass	$1/2t < z \le 2t$	Not exceed 1/3k	x ≤ 1/8a	
		⊙ If there are 2 or more 6.1.2 Corner crack:	e chips, x is total length	of each chip.	
			T	T	
		z: Chip thickness	y: Chip width	x: Chip length	
		Z≦1/2t	Not over viewing area	$x \le 1/8a$	
		$1/2t < z \le 2t$	Not exceed 1/3k	x ≤ 1/8a	
		⊙ If there are 2 or more	e chips, x is the total len	gth of each chip.	

NO	Item	Criterion			AQL
		Symbols:			
		x: Chip length y: Ch	ip width z: Chip	thickness	
		k: Seal width t: Gla	ass thickness a: LCD	side length	
		L: Electrode pad length			
		6.2 Protrusion over termina	તી :		
		6.2.1 Chip on electrode pad	1:		
06	Glass		$\leq 1/8a$	$\begin{array}{c} \text{Chip thickness} \\ 0 < z \leqq t \end{array}$	2.5
		y: Chip width	x: Chip length	z: Chip thickness	
		$y \le L$	$x \le 1/8a$	$0 < z \le t$	
		⊙ If the chipped area touch			
		remain and be inspected ac • If the product will be hea			
		be damaged.	at scaled by the custom	er, the angiment mark not	
		6.2.3 Substrate protuberance	e and internal crack		
		X		1 1	
			y: width	x: length	
			$y \le 1/3L$	$x \leq a$	
		12			

NO	Item	Criterion	AQL
07	Cracked glass	The LCD with extensive crack is not acceptable.	2.5
		8.1 Illumination source flickers when lit.	0.65
00	Backlight	8.2 Spots or scratched that appear when lit must be judged.	2.5
08	elements	Using LCD spot, lines and contamination standards.	
		8.3 Backlight doesn't light or color wrong.	0.65
		9.1 Bezel may not have rust, be deformed or have fingerprints,	2.5
09	Bezel	stains or other contamination.	
		9.2 Bezel must comply with job specifications.	0.65
		10.1 COB seal may not have pinholes larger than 0.2mm or contamination.	2.5
		10.2 COB seal surface may not have pinholes through to the IC.	2.5
		10.3 The height of the COB should not exceed the height	0.65
		indicated in the assembly diagram.	
		10.4 There may not be more than 2mm of sealant outside the	2.5
		seal area on the PCB. And there should be no more than three	
		places.	
		10.5 No oxidation or contamination PCB terminals.	2.5
10	PCB、COB	10.6 Parts on PCB must be the same as on the production	0.65
10	TCD COD	characteristic chart. There should be no wrong parts, missing	
		parts or excess parts.	
		10.7 The jumper on the PCB should conform to the product characteristic chart.	0.65
		10.8 If solder gets on bezel tab pads, LED pad, zebra pad or	2.5
		screw hold pad, make sure it is smoothed down.	
		10.9 The Scraping testing standard for Copper Coating of PCB	2.5
	15	X	
		$X * Y \le 2mm^2$	
4		11.1 No un-melted solder paste may be present on the PCB.	2.5
		11.2 No cold solder joints, missing solder connections,	2.5
11	Soldering	oxidation or icicle.	
		11.3 No residue or solder balls on PCB.	2.5
		11.4 No short circuits in components on PCB.	0.65

NO	Item	Criterion	AQL
		12.1 No oxidation, contamination, curves or, bends on interface	2.5
		Pin (OLB) of TCP.	
		12.2 No cracks on interface pin (OLB) of TCP.	0.65
		12.3 No contamination, solder residue or solder balls on product.	2.5
		12.4 The IC on the TCP may not be damaged, circuits.	2.5
		12.5 The uppermost edge of the protective strip on the interface	2.5
		pin must be present or look as if it cause the interface pin to sever.	
	General	12.6 The residual rosin or tin oil of soldering (component or chip	2.5
12		component) is not burned into brown or black color.	
	appearance	12.7 Sealant on top of the ITO circuit has not hardened.	2.5
		12.8 Pin type must match type in specification sheet.	0.65
		12.9 LCD pin loose or missing pins.	0.65
		12.10 Product packaging must the same as specified on packaging	0.65
		specification sheet.	
		12.11 Product dimension and structure must conform to product	0.65
		specification sheet.	
		12.12 Visual defect outside of VA is not considered to be rejection.	0.65

13.Material List of Components for

RoHs

1. WINSTAR Display Co., Ltd hereby declares that all of or part of products (with the mark "#"in code), including, but not limited to, the LCM, accessories or packages, manufactured and/or delivered to your company (including your subsidiaries and affiliated company) directly or indirectly by our company (including our subsidiaries or affiliated companies) do not intentionally contain any of the substances listed in all applicable EU directives and regulations, including the following substances.

Exhibit A: The Harmful Material List

Material	Cd	Pb	Hg	Cr6+	PBB	PBDE	DEHP	BBP	DBP	DIBP
Limited	100	1000	1000	1000	1000	1000	1000	1000	1000	1000
Value	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
Above limi	Above limited value is set up according to RoHS.									

- 2.Process for RoHS requirement : (only for RoHS inspection)
 - (1) Use the Sn/Ag/Cu soldering surface; the surface of Pb-free solder is rougher than we used before.
 - (2) Heat-resistance temp. :

Reflow: 250°C,30 seconds Max.;

Connector soldering wave or hand soldering : 320°C, 10 seconds max.

(3) Temp. curve of reflow, max. Temp. $: 235\pm5^{\circ}C$;

Recommended customer's soldering temp. of connector: 280°C, 3 seconds.

14.Recommendable Storage

- 1. Place the panel or module in the temperature 25°C±5°C and the humidity below 65% RH
- 2. Do not place the module near organics solvents or corrosive gases.
- 3. Do not crush, shake, or jolt the module.



winstar <u>LCM Samp</u> Module Number :		Feedback Sheet Page: 1
1 · Panel Specification :		Tuge. I
1. Panel Type:	Pass	□ NG,
2. View Direction:	☐ Pass	□ NG ,
3. Numbers of Dots:	☐ Pass	□ NG ,
4. View Area:	☐ Pass	□ NG ,
5. Active Area:	☐ Pass	□ NG ,
6. Operating Temperature:	☐ Pass	□ NG ,
7. Storage Temperature:	☐ Pass	□ NG ,
8. Others:		
2 · Mechanical Specification :		
1. PCB Size:	Pass	\square NG,
2. Frame Size :	☐ Pass	□ NG,
3. Materal of Frame:	Pass	\bigcap NG,
4. Connector Position:	☐ Pass	□ NG,
5. Fix Hole Position:	☐ Pass	□ NG,
6. Backlight Position:	☐ Pass	□ NG ,
7. Thickness of PCB:	☐ Pass	□ NG ,
8. Height of Frame to PCB:	☐ Pass	□ NG,
9. Height of Module:	Pass	□ NG ,
10. Others:	☐ Pass	□ NG,
3 · Relative Hole Size :		
1. Pitch of Connector :	☐ Pass	□ NG ,
2. Hole size of Connector:	Pass	□ NG ,
3. Mounting Hole size :	Pass	□ NG ,
4. Mounting Hole Type:	Pass	□ NG ,
5. Others:	☐ Pass	□ NG ,
4 · Backlight Specification :		
1. B/L Type:	☐ Pass	□ NG ,
2. B/L Color:	☐ Pass	□ NG ,
3. B/L Driving Voltage (Refere	ence for LED 7	
4. B/L Driving Current:	Pass	□ NG ,
5. Brightness of B/L:	☐ Pass	□ NG ,
6. B/L Solder Method:	☐ Pass	□ NG ,
7. Others:	Pass	□ NG ,
	>> Go to	page 2 <<

_	er:		Page: 2
5 · Electron	ic Characteristics of	Module:	
1. Input Vo	oltage:	☐ Pass	☐ NG ,
2. Supply 0	Current:	☐ Pass	☐ NG ,
3. Driving	Voltage for LCD:	☐ Pass	☐ NG ,
4. Contrast	for LCD:	☐ Pass	□ NG ,
5. B/L Driv	ving Method:	☐ Pass	□ NG ,
6. Negative	e Voltage Output:	☐ Pass	☐ NG ,
7. Interface	e Function:	☐ Pass	□ NG ,
8. LCD Un	iformity:	☐ Pass	□ NG ,
9. ESD tes	t :	☐ Pass	□ NG ,
10. Others:		☐ Pass	□ NG ,
		Oly	