
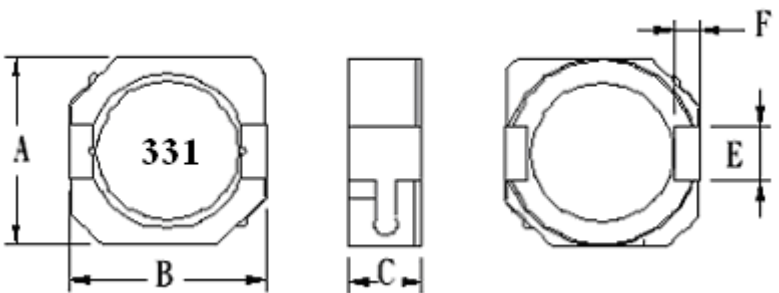


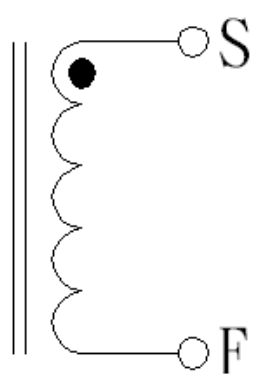



SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:
PART NO: SDI105R-331M		DWG.NO: MY2367402
CUSTOMER PART NO:		CUST.DWG.NO:
<p>(1) DIMENSION(UNIT: mm)</p> 		A 10.3 (MAX) m/m
		B 10.5 (MAX) m/m
		C 5.0 (MAX) m/m
		E 3.0 (REF) m/m
		F 1.2 (REF) m/m
		G m/m
		H m/m
		I m/m
		J m/m
		K m/m
(2)ELECTRICAL REQUIREMENTS		(3)SCHEMATIC
L (uH)	330 ± 20%	
RDC (Ω)	0.8 (MAX)	
IDC (A)	0.5 (MAX)	
TEST CONDITION	100KHZ / 0.1V	
<p>APPROVED BY</p> 		CHECKED BY
		
		DRAWN BY
		

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER:				DATE:			
PART NO: SDI105R-331M				DWG.NO: MY2367402			
CUSTOMER PART NO :				CUST.DWG.NO :			
TEST CONDITION: 100KHZ / 0.1V				DIMENSION (UNIT : mm)			
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	B	C	
SPEC	330 ± 20%	0.8 (MAX)	0.5 (MAX)	10.3 (MAX)	10.5 (MAX)	5.0 (MAX)	
1	337.6	0.57	OK	10.04	10.36	4.75	
2	331.2	0.59	OK	10.09	10.43	4.71	
3	317.8	0.58	OK	10.06	10.34	4.68	
4	319.8	0.57	OK	10.05	10.36	4.75	
5	321.5	0.59	OK	10.11	10.40	4.78	
6	334.5	0.61	OK	10.15	10.34	4.85	
7	305.6	0.59	OK	10.04	10.38	4.73	
8	312.6	0.58	OK	10.05	10.33	4.75	
9	319.8	0.59	OK	10.05	10.37	4.67	
10	320.0	0.58	OK	10.06	10.34	4.77	
\bar{X}	322.04	0.585		10.07	10.365	4.744	
R	32	0.04		0.11	0.1	0.18	
TEST INSTRUMENTS DV-6021 LCR METER VR-131 RDC METER CH-301A BA/S CURRENT				APPROVED BY			
							
				CHECKED BY			
							
				DRAWN BY			
							

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw