



# SPECIFICATION FOR APPROVAL

|                      |                    |
|----------------------|--------------------|
| CUSTOMER :           | DATE :             |
| PART NO : LFU09V-103 | DWG.NO : TD1241102 |
| CUSTOMER PART NO :   | CUST.DWG.NO :      |

(1) UNIT: mm

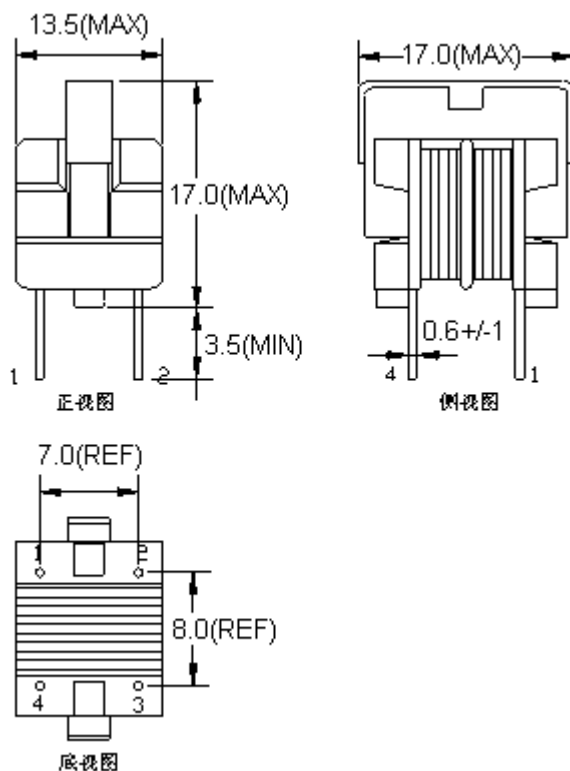

|                 |                   |                    |
|-----------------|-------------------|--------------------|
| DRAWN BY<br>AMY | CHECKED BY<br>張明德 | APPROVED BY<br>吳載敏 |
|-----------------|-------------------|--------------------|

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB:www.coremaster.com.tw

# SPECIFICATION FOR APPROVAL

| CUSTOMER :           |                         | DATE :                |                        |
|----------------------|-------------------------|-----------------------|------------------------|
| PART NO : LFU09V-103 |                         | DWG.NO : TD1241102    |                        |
| CUSTOMER PART NO :   |                         | CUST.DWG.NO :         |                        |
| PARAMETER            | TERMINAL                | SPECIFICATION         | TEST INSTRUMENTS       |
| INDUCTANCE           | L (1-2)=(4-3)           | 10mH (MIN)            | 1KHz/0.25V             |
|                      |                         |                       |                        |
| DCR:                 | DCR (1-2)=(4-3)         | 2.6Ω (MAX)            |                        |
|                      |                         |                       |                        |
| IDC                  | IDC (1-2)=(4-3)         | 0.3A (MAX)            |                        |
|                      |                         |                       |                        |
| HI-POT               | PIN1-PIN4               | AC 1.8KV/5mA/1SEC     |                        |
|                      | PIN1,4-CORE             | AC 1.0KV/5mA/1SEC     |                        |
|                      |                         |                       |                        |
| MATERIAL             | SPEC                    | SUPPLIER              | REMARK                 |
| CORE                 | UU9.8 R10K              | VAKOS                 |                        |
| WIRE                 | 2UEWφ 0.2<br>NTL 130°C  | TAI-I                 |                        |
| WINDING              | 150TS(REF)              |                       |                        |
| BOBBIN               | UU9.8<br>PLENOLIC T375J | CHANGCHUN             |                        |
|                      |                         |                       |                        |
| DRAWN BY<br><br>AMY  |                         | CHECKED BY<br><br>張明德 | APPROVED BY<br><br>吳載敏 |

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB:www.coremaster.com.tw

# SPECIFICATION FOR APPROVAL

|                      |       |     |                    |           |                    |
|----------------------|-------|-----|--------------------|-----------|--------------------|
| CUSTOMER :           |       |     | DATE :             |           |                    |
| PART NO : LFU09V-103 |       |     | DWG.NO : TD1241102 |           |                    |
| CUSTOMER PART NO :   |       |     | CUST.DWG.NO :      |           |                    |
| 繞組                   | START | END | WIRE SIZE          | TURNS(TS) | TAPE(TS)           |
| N1                   | 1     | 2   | $\phi$ 0.2×1P      | 150(REF)  |                    |
| N2                   | 4     | 3   | $\phi$ 0.2×1P      | 150(REF)  |                    |
| DRAWN BY<br>AMY      |       |     | CHECKED BY<br>張明德  |           | APPROVED BY<br>吳載敏 |

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB:www.coremaster.com.tw