


SAVIOR DC BRUSHLESS FAN

SD09225


92x92x25.4mm

DESIGN FEATURES


- *BEARING SYSTEM: SLEEVE BEARING & BALL BEARING
- *IMPELLER: PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- *HOUSING: PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- *MOTOR: BRUSHLESS DC
- *CONNECTING: WIRE LEADS
- *SPEED: H- HIGH SPEED TYPE
M-MEDIUM SPEED TYPE
L- LOW SPEED TYPE
- *AVAILABLE FG TYPE FOR SPEED SENSOR SIGNAL
- *AVAILABLE RD TYPE FOR ROTOR LOCKED ALARM SIGNAL

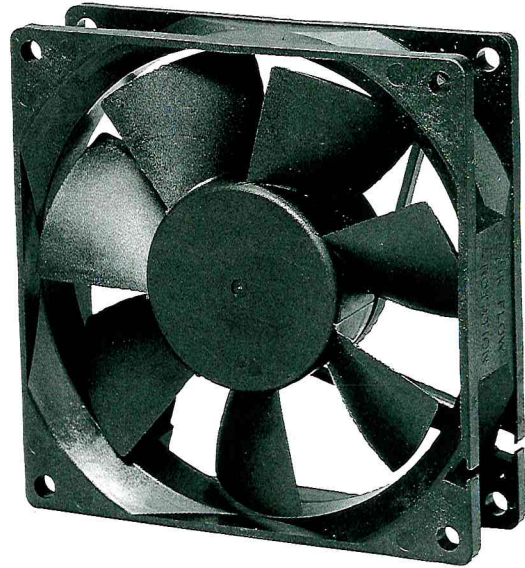

DIMENSIONS:MM

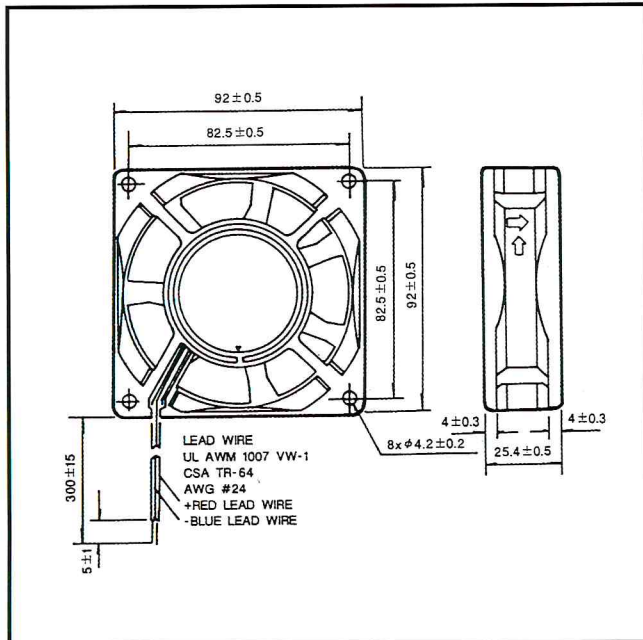

PERFORMANCE

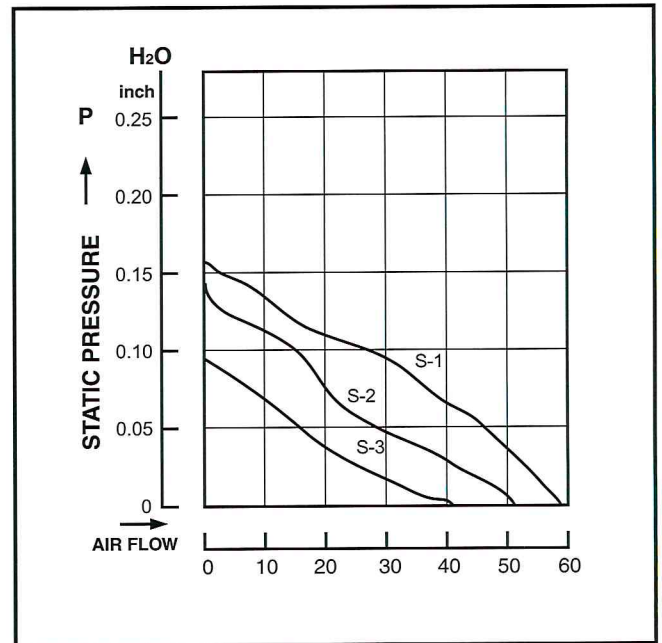

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
SD09225H	12	59.0	1.67	0.32	3.84	3000	0.16	36
	24	59.0	1.67	0.18	4.32	3000	0.16	36
SD09225M	12	50.5	1.43	0.20	2.40	2500	0.14	34
	24	50.5	1.43	0.14	3.36	2500	0.14	34
SD09225L	12	41.5	1.18	0.16	1.92	2200	0.09	26
	24	41.5	1.18	0.10	2.40	2200	0.09	26