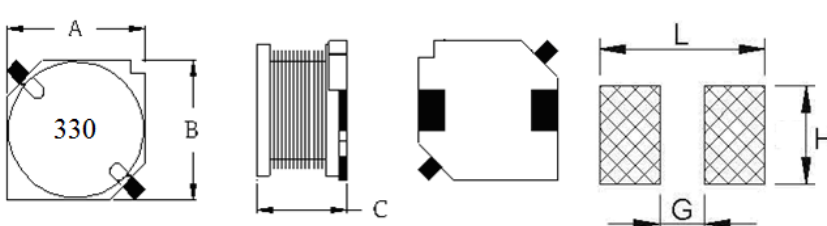
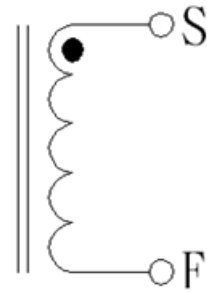


SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:
PART NO: TPY0705-330M		DWG.NO: MY3301793
CUSTOMER PART NO:		CUST.DWG.NO:
(1) DIMENSION(UNIT: mm) 		A 7.0 ± 0.3 m/m
		B 7.0 ± 0.3 m/m
		C 4.6 ± 0.3 m/m
		D m/m
		G 4.9 (RFE) m/m
		H 2.2 (REF) m/m
		L 7.9 (RFE) m/m
		J m/m
(2)ELECTRICAL REQUIREMENTS		(3)SCHEMATIC
L (uH)	33 ± 20%	
RDC (Ω)	0.2 (MAX)	
IDC (A)	1.8 (MAX)	
TEST CONDITION	1KHz / 0.5V	
(4)MATERIAL LIST		
NO/ITEM	MATERIAL	SUPPLIER
CORE	DR5.4×4(S) B2.5 F2.5 或同等級	昱欣
WIRE TYPE	2UEW φ 0.23m/m 或同等級	上海中馬
WINDING	36.5 TS (REF)	
BASE	彈片 C-0034-1 或同等級	碩誠
		APPROVED BY 吳載敏
		CHECKED BY 張明德
		DRAWN BY Vicky

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER:				DATE:			
PART NO: TPY0705-330M				DWG.NO: MY3301793			
CUSTOMER PART NO :				CUST.DWG.NO :			
TEST CONDITION: 1KHz / 0.5V				DIMENSION (UNIT : mm)			
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	B	C	
SPEC	33 ± 20%	0.2 (MAX)	1.8 (MAX)	7.0 ± 0.3	7.0 ± 0.3	4.6 ± 0.3	
1	33.1	0.187	OK	6.99	7.03	4.54	
2	32.5	0.188	OK	6.96	7.02	4.52	
3	32.7	0.189	OK	6.98	7.01	4.50	
4	31.7	0.188	OK	6.97	7.02	4.52	
5	30.5	0.187	OK	6.98	7.04	4.53	
6	31.6	0.188	OK	6.98	7.04	4.52	
7	32.5	0.185	OK	6.98	7.02	4.54	
8	30.9	0.188	OK	6.97	7.03	4.53	
9	31.8	0.190	OK	6.99	7.02	4.52	
10	32.4	0.189	OK	6.96	7.04	4.50	
\bar{X}	32.0	0.188		6.98	7.03	4.52	
R	2.6	0.005		0.03	0.03	0.04	
TEST INSTRUMENTS HIOKI3532-50 LCR METER VR-131 RDC METER VR116+VR7220 BA/S CURRENT				APPROVED BY			
				吳載敏			
				CHECKED BY			
				張明德			
				DRAWN BY			
				Vicky			


CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

INDUCTANCE VS CURRENT

CUSTOMER:	DATE:
PART NO: TPY0705-330M	DWG.NO: MY3301793
CUSTOMER PART NO :	CUST.DWG.NO :

CURRENT VS INDUCTANCE					
IDC(A)	INDUCTANCE(uH)				
0	32.5				
0.5	31.2				
1.0	30.8				
1.7	27.8				
1.8	26.9				

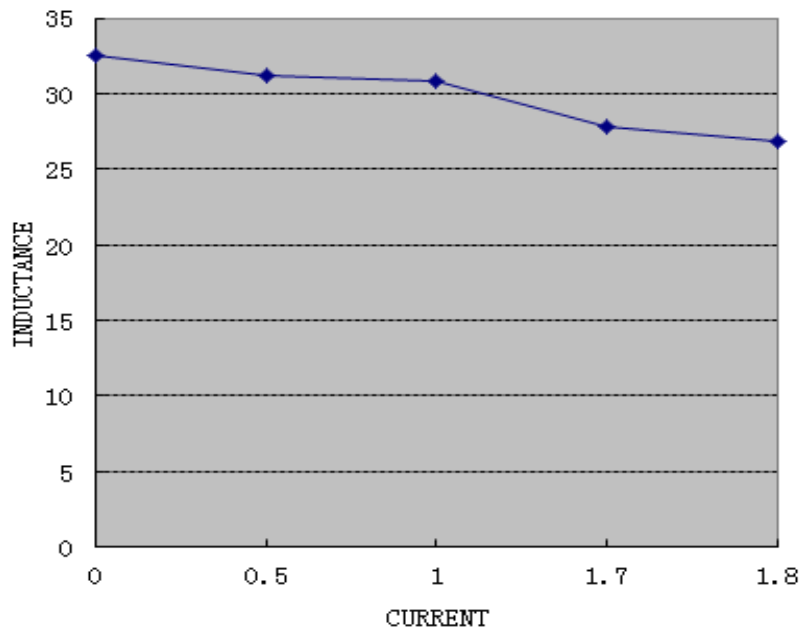

APPROVED BY 吳載敏	CHECKED BY 張明德	DRAWN BY Vicky
--------------------	-------------------	-------------------

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw