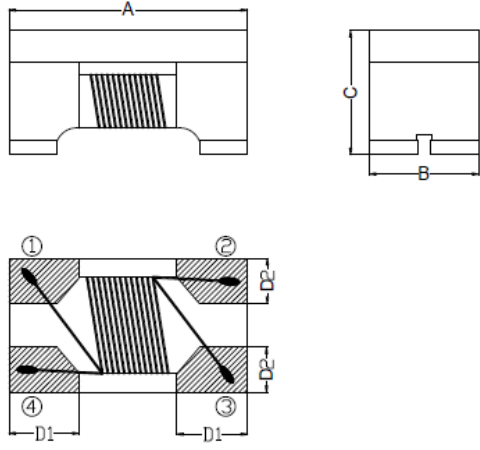


SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:			
PART NO: WCB2012-900Y-N		DWG.NO: EM0602011			
CUSTOMER PART NO:		CUST.DWG.NO:			
<p>(1) DIMENSIONS (UNIT: mm)</p> 		A	2.0 ± 0.2 m/m		
		B	1.2 ± 0.2 m/m		
		C	1.2 ± 0.2 m/m		
		D1	0.45 (REF) m/m		
		D2	0.40 (REF) m/m		
		E	m/m		
		G	m/m		
		H	m/m		
		I	m/m		
		J	m/m		
(2) ELECTRICAL REQUIREMENTS					
Z (Ω)	90 ± 25%			TEST FREQ	100MHz
RDC (Ω)	0.3 (MAX)			TEST FREQ	
IDC (mA)	400 (MAX)			TEST FREQ	
<p>TEST INSTRUMENTS: HP-E4991A HP-16197A CHROMA 16502</p>		APPROVED BY 吳載敏			
		CHECKED BY 張明德			
		DRAWN BY 黃慧診			

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER :				DATE :					
PART NO: WCB2012-900Y-N				DWG.NO: EM0602011					
CUSTOMER PART NO :				CUST.DWG.NO :					
ITEM	Z (Ω)	RDC (Ω)	IDC (mA)						
FREQ	100MHz								
SPEC	90 ± 25%	0.3 (MAX)	400 (MAX)						
1	82.7	0.15	OK						
2	80.4	0.14	OK						
3	80.9	0.14	OK						
4	80.4	0.14	OK						
5	83.6	0.14	OK						
6	81.1	0.14	OK						
7	81.5	0.14	OK						
8	78.8	0.14	OK						
9	80.7	0.14	OK						
10	81.5	0.14	OK						
\bar{X}	81.2	0.14							
R	4.8	0.01							
						APPROVED BY			
						吳載敏			
						CHECKED BY			
						張明德			
						DRAWN BY			
						黃慧診			

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-9819-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

WCB2012-900Y-N

